
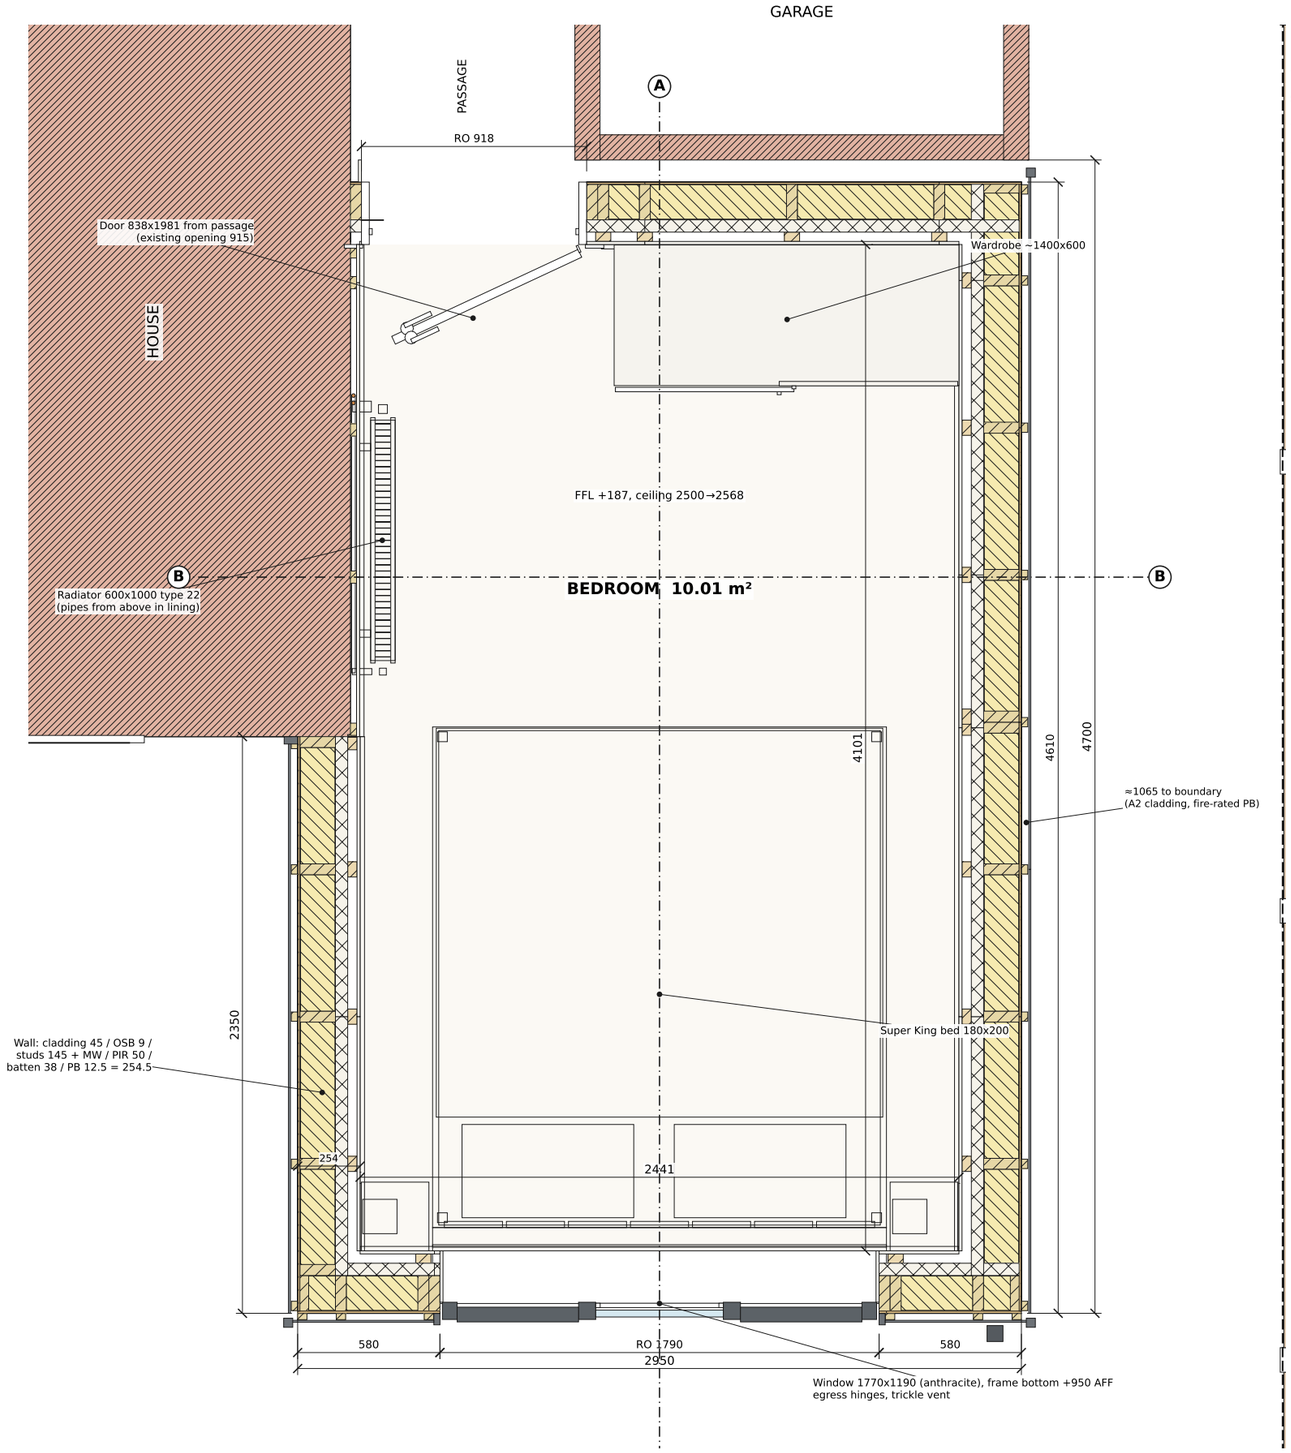



FLOOR PLAN (cut at +1200)

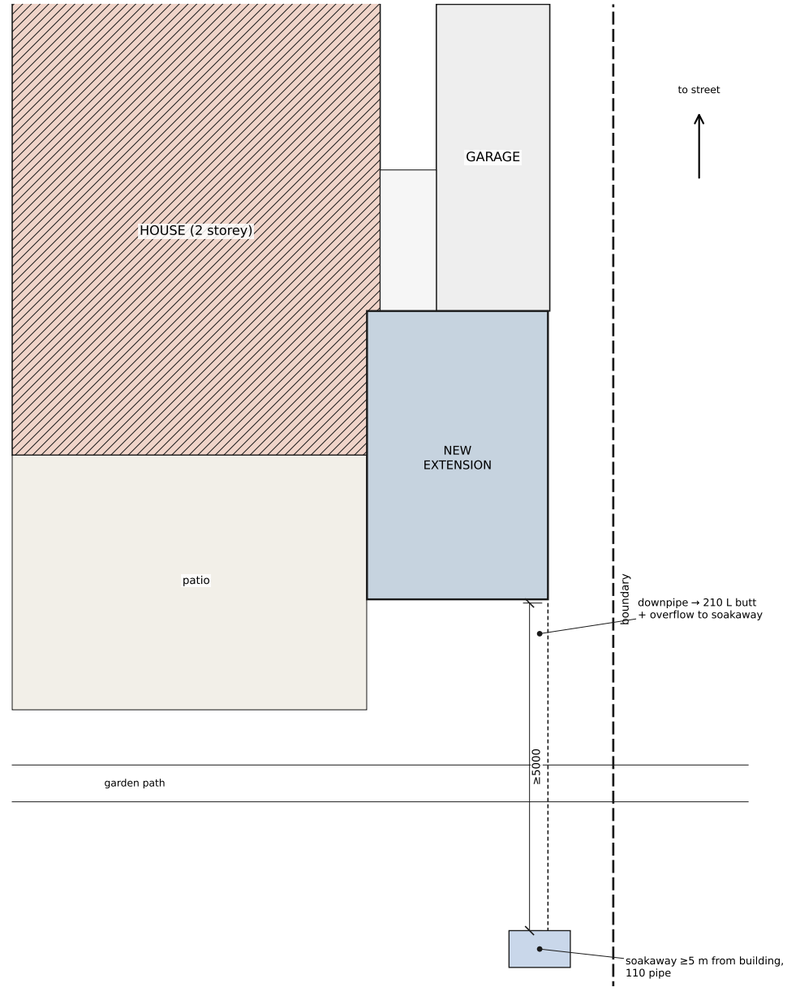


SITE PLAN 1:100

NOTES
1. Datum 0.000 = top of existing foundation (2 block courses). Ground −195.
2. FFL +187 (passage +195): threshold strip 8–10 mm.
3. Existing foundation depth to be confirmed by trial hole for BC.
4. Foundation diagonals 5150/5130: set out frame square.
5. Distance to boundary assumed ≈1.0 m — verify on site.
6. Electrical: first fix by owner; connection & certification by Part P registered electrician.

Timber-frame bedroom extension, 2.95 x 4.70 m	
Plans: floor plan (1:25), site plan (1:100)	**Sheet 01**
Scale 1:25 / 1:100 @A3. Dimensions in mm.	10.10.2026 rev A

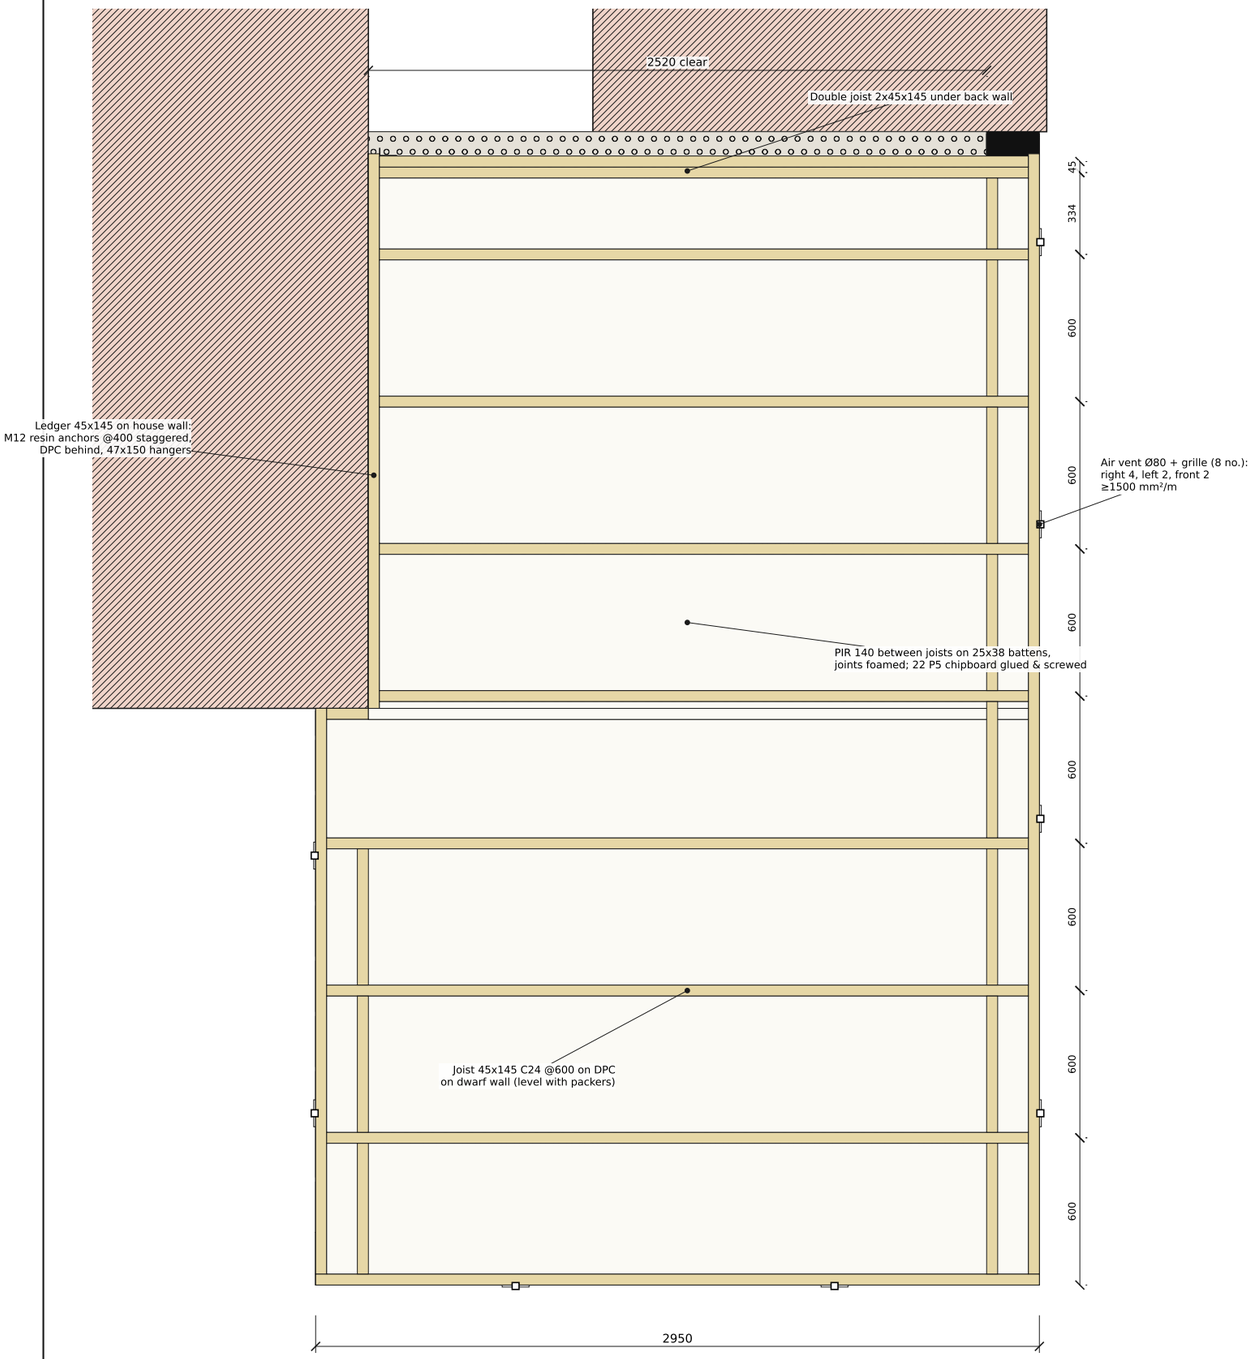

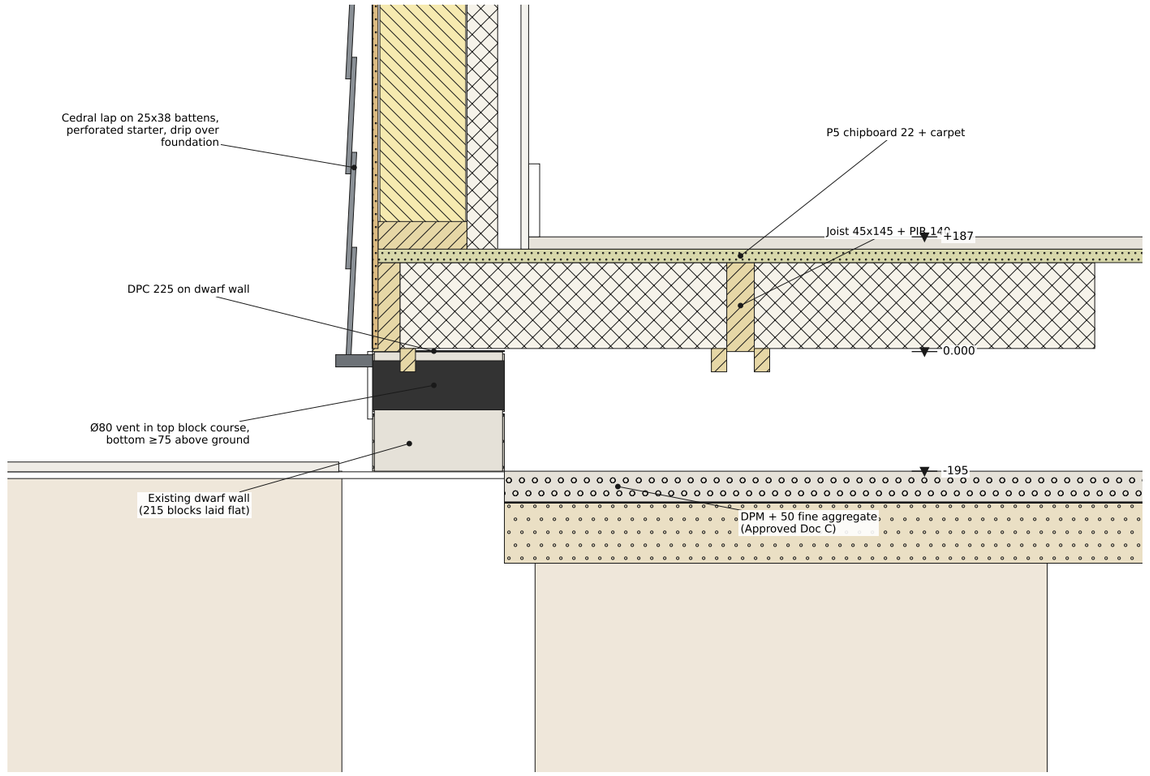


DETAIL 1: base / floor / vent (1:10)


Sequence: strip turf & 150 soil → 75 MOT Type 1 + 25 sand blinding → DPM → 50 fine aggregate (top not below outside ground) → vents → DPC → joists → PIR → chipboard. Void ≥150 mm (actual ~195). Ventilation: openings in two opposite walls ≥1500 mm²/m run or 500 mm²/m² floor area, whichever greater.

FLOOR FRAMING PLAN (deck omitted)

Timber-frame bedroom extension, 2.95 x 4.70 m	
Foundation, sub-floor and floor framing	**Sheet 02**
Scale 1:25 / 1:10 @A3	10.10.2026 rev A

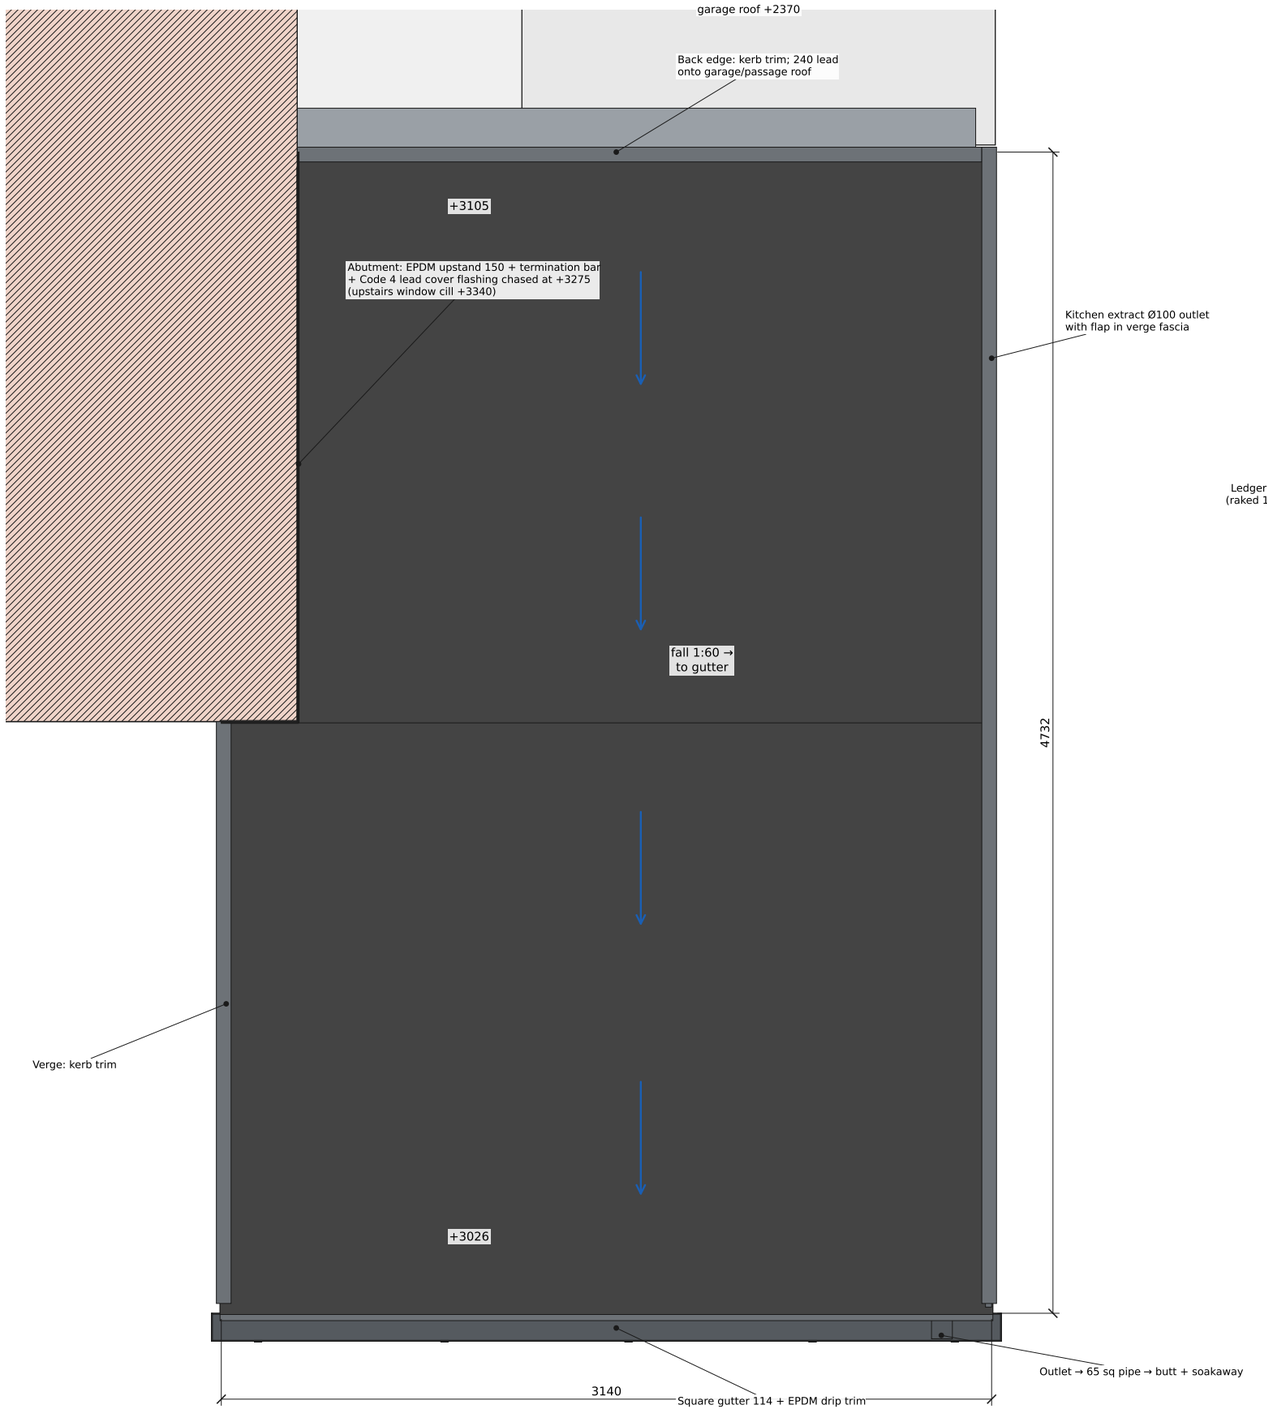


ROOF PLAN (EPDM, fall 1:60 to front)

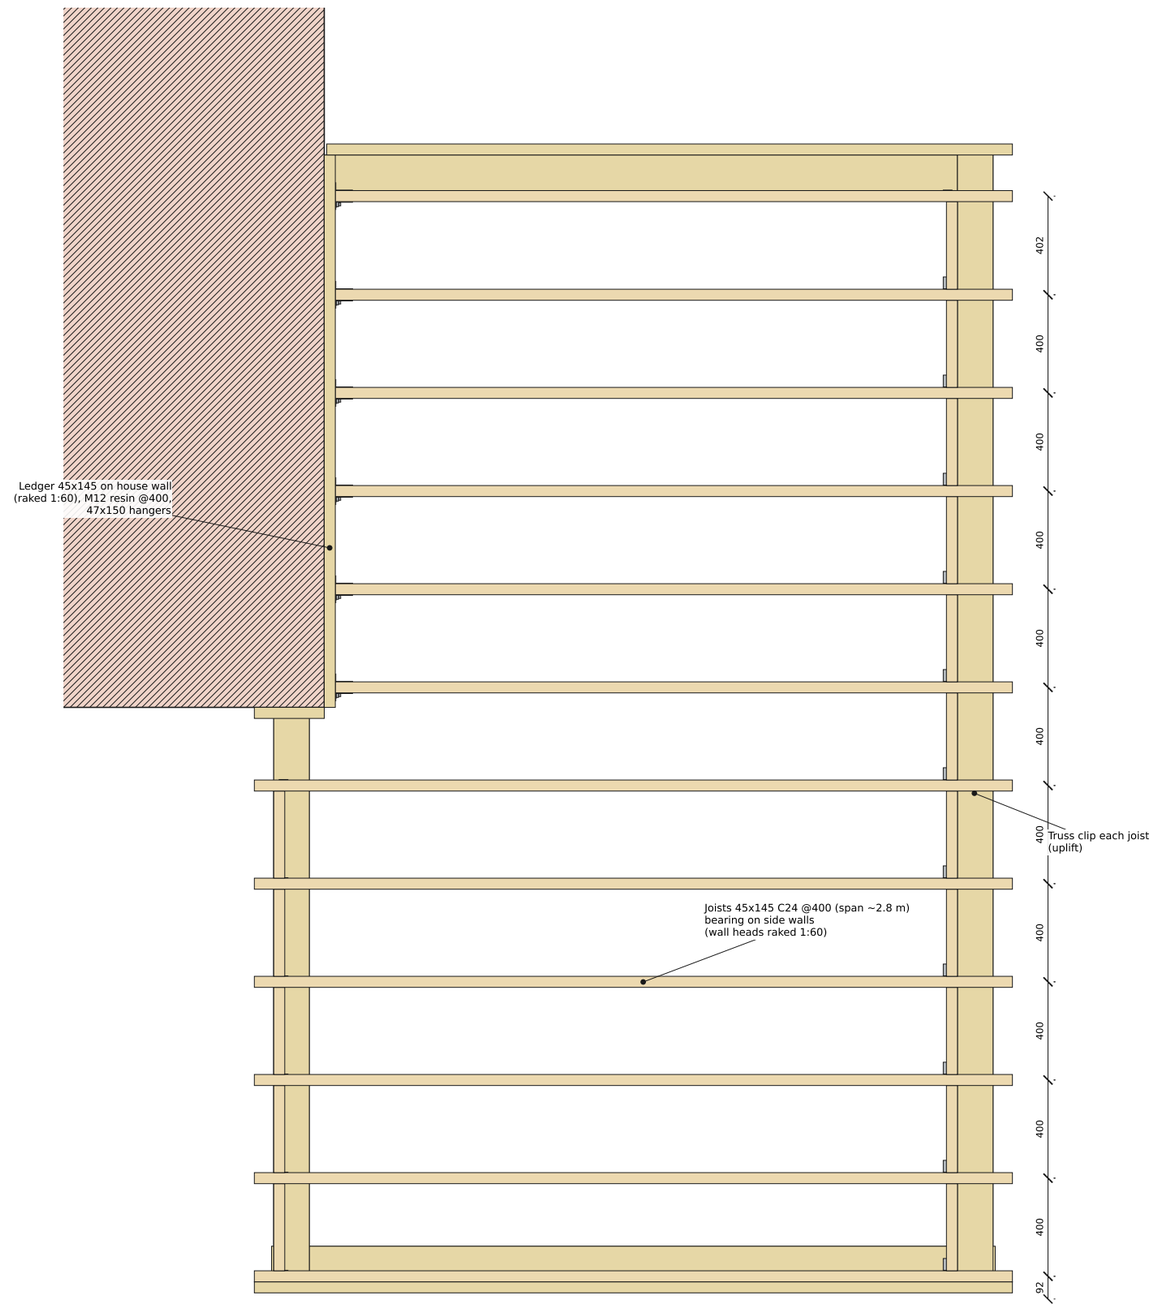


Each joist is level; the roof fall comes from the raked wall heads (each joist at a different height).

ROOF JOIST LAYOUT


Timber-frame bedroom extension, 2.95 x 4.70 m	
Roof: roof plan and joist layout	**Sheet 03**
Scale 1:25 @A3	10.10.2026 rev A

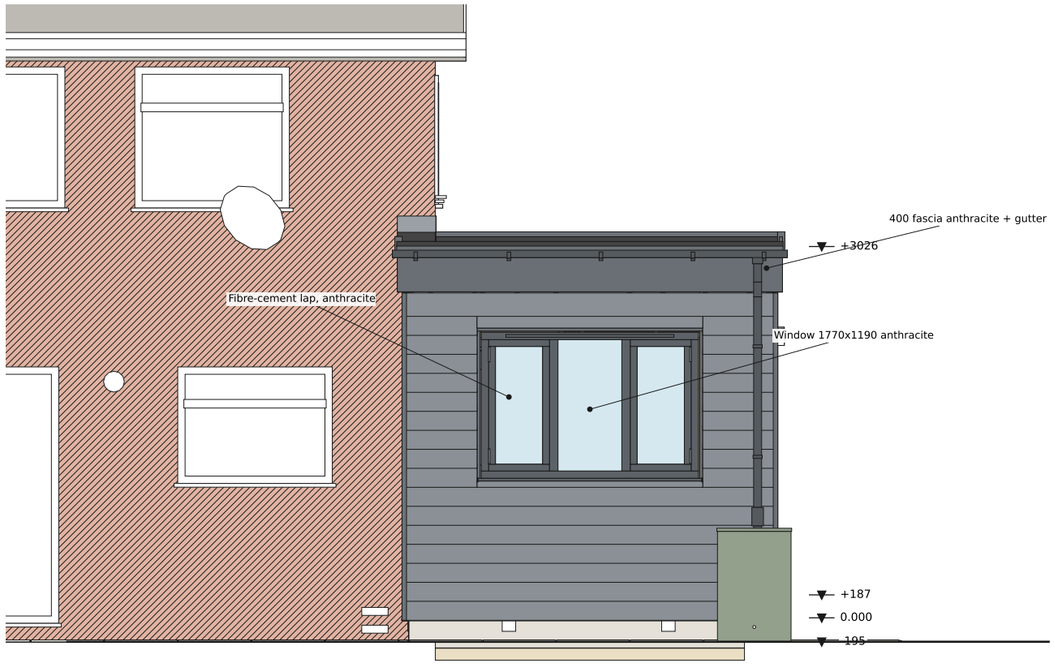


GARDEN (FRONT) ELEVATION

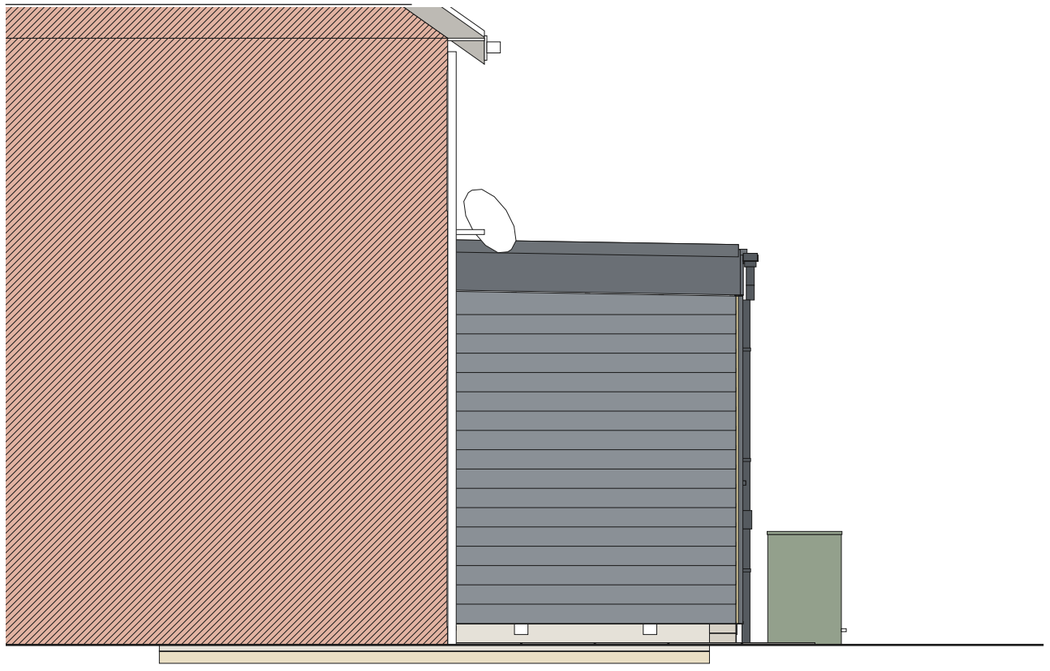

LEFT SIDE ELEVATION

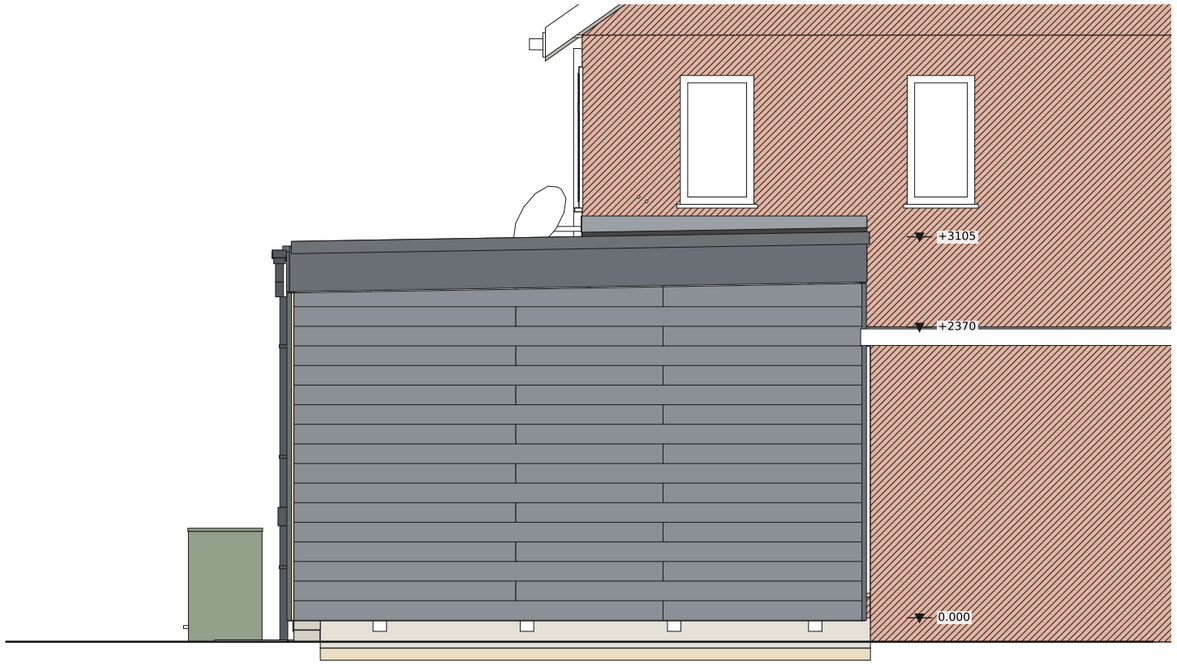


RIGHT SIDE ELEVATION

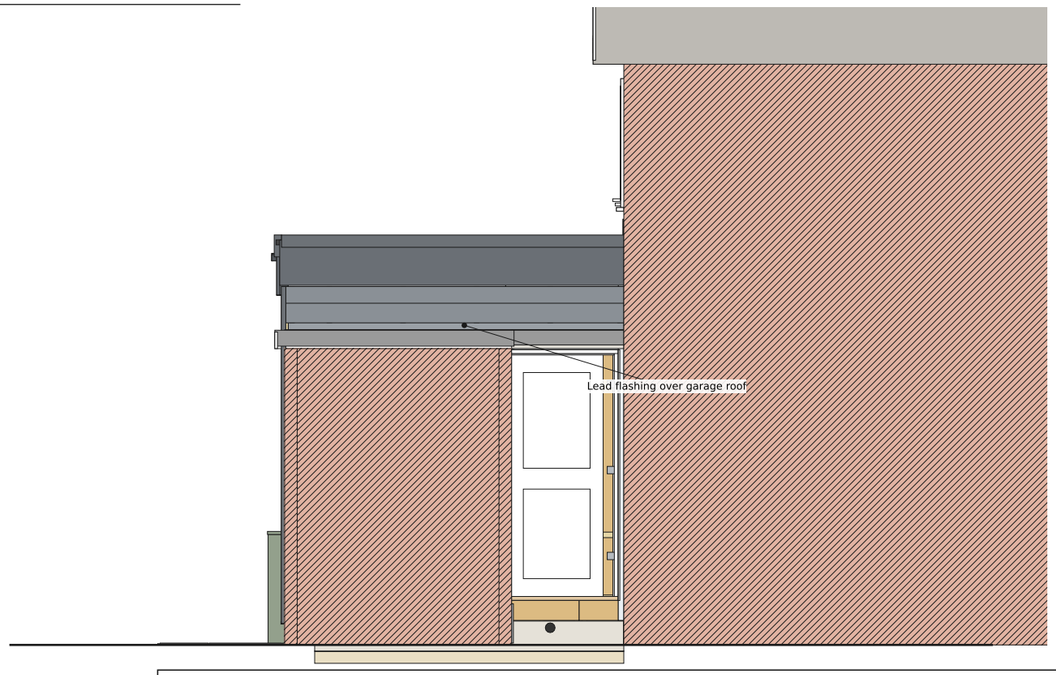

REAR (OVER GARAGE)


Timber-frame bedroom extension, 2.95 x 4.70 m

Elevations	**Sheet 04**
Scale 1:50 @A3	10.10.2026 rev A

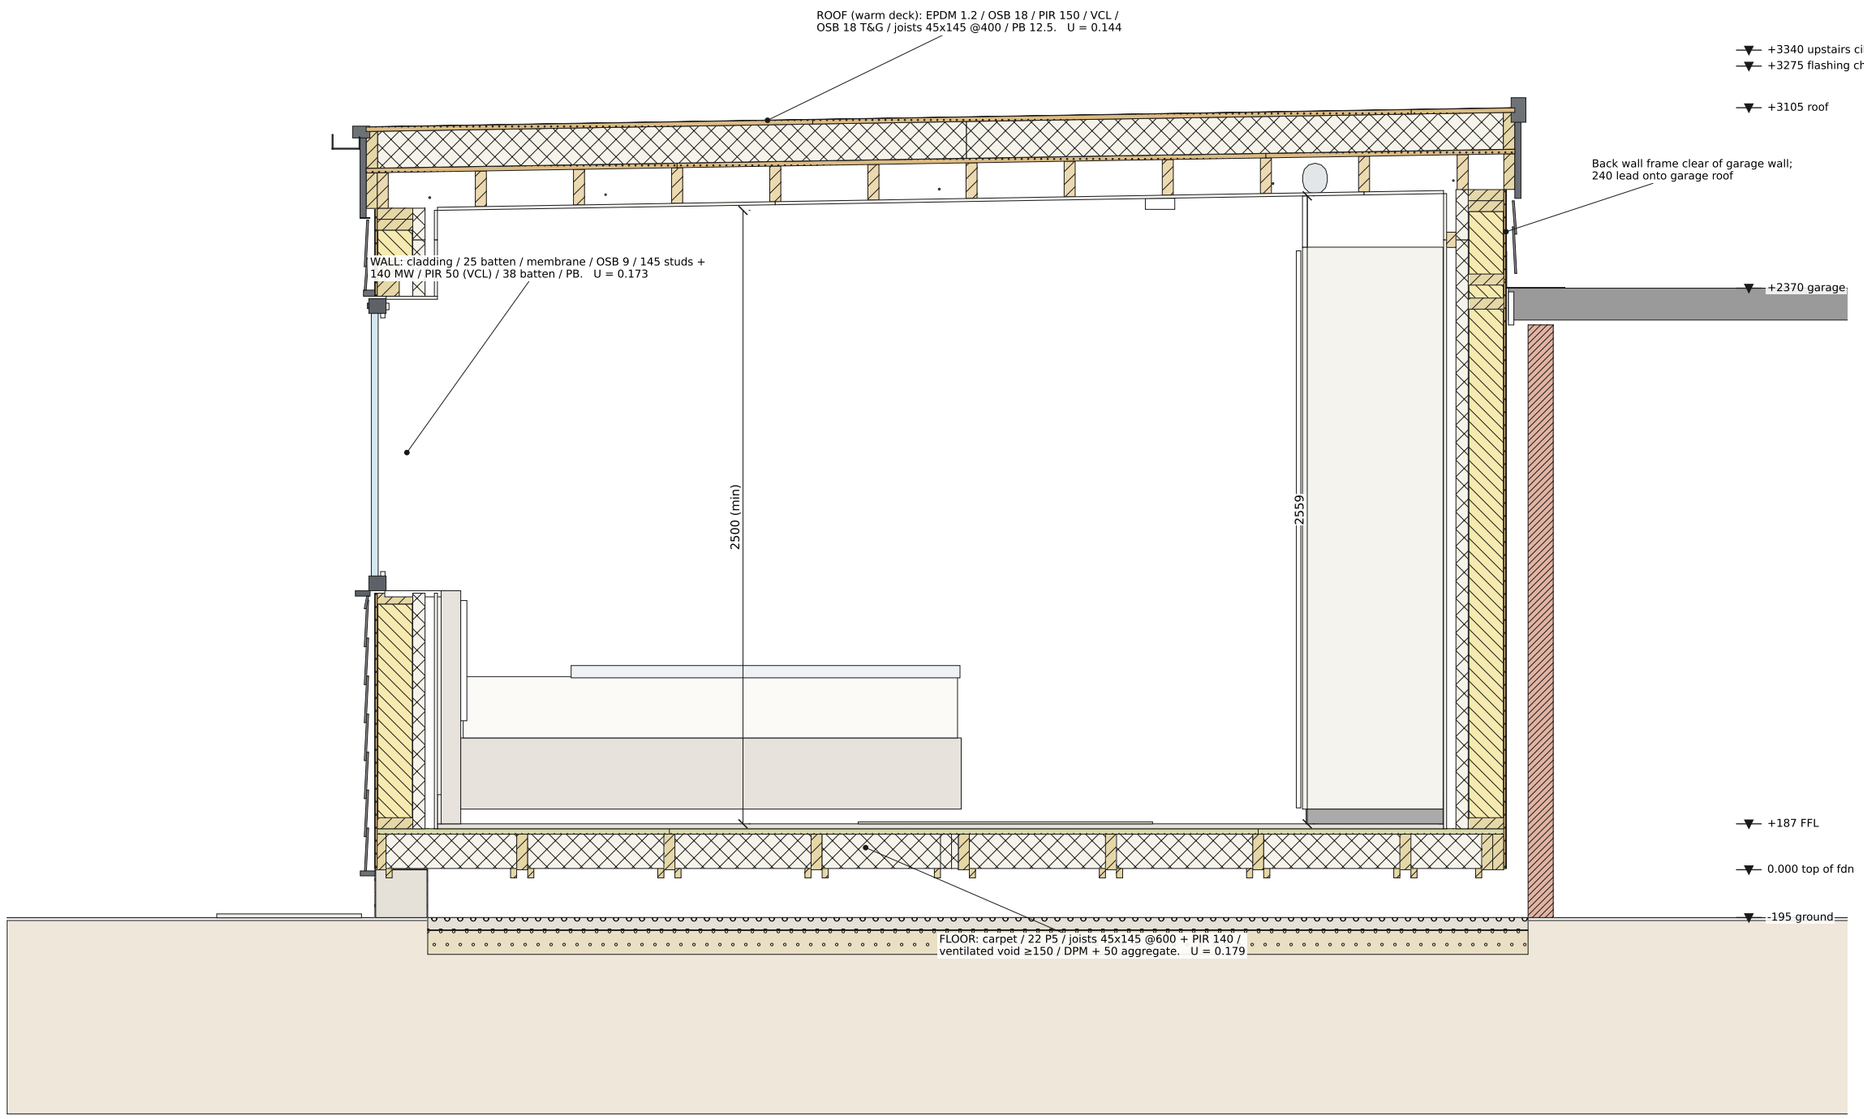


SECTION A-A (window centreline)


Timber-frame bedroom extension, 2.95 x 4.70 m	
Section A-A (longitudinal)	**Sheet 05**
Scale 1:25 @A3	10.10.2026 rev A

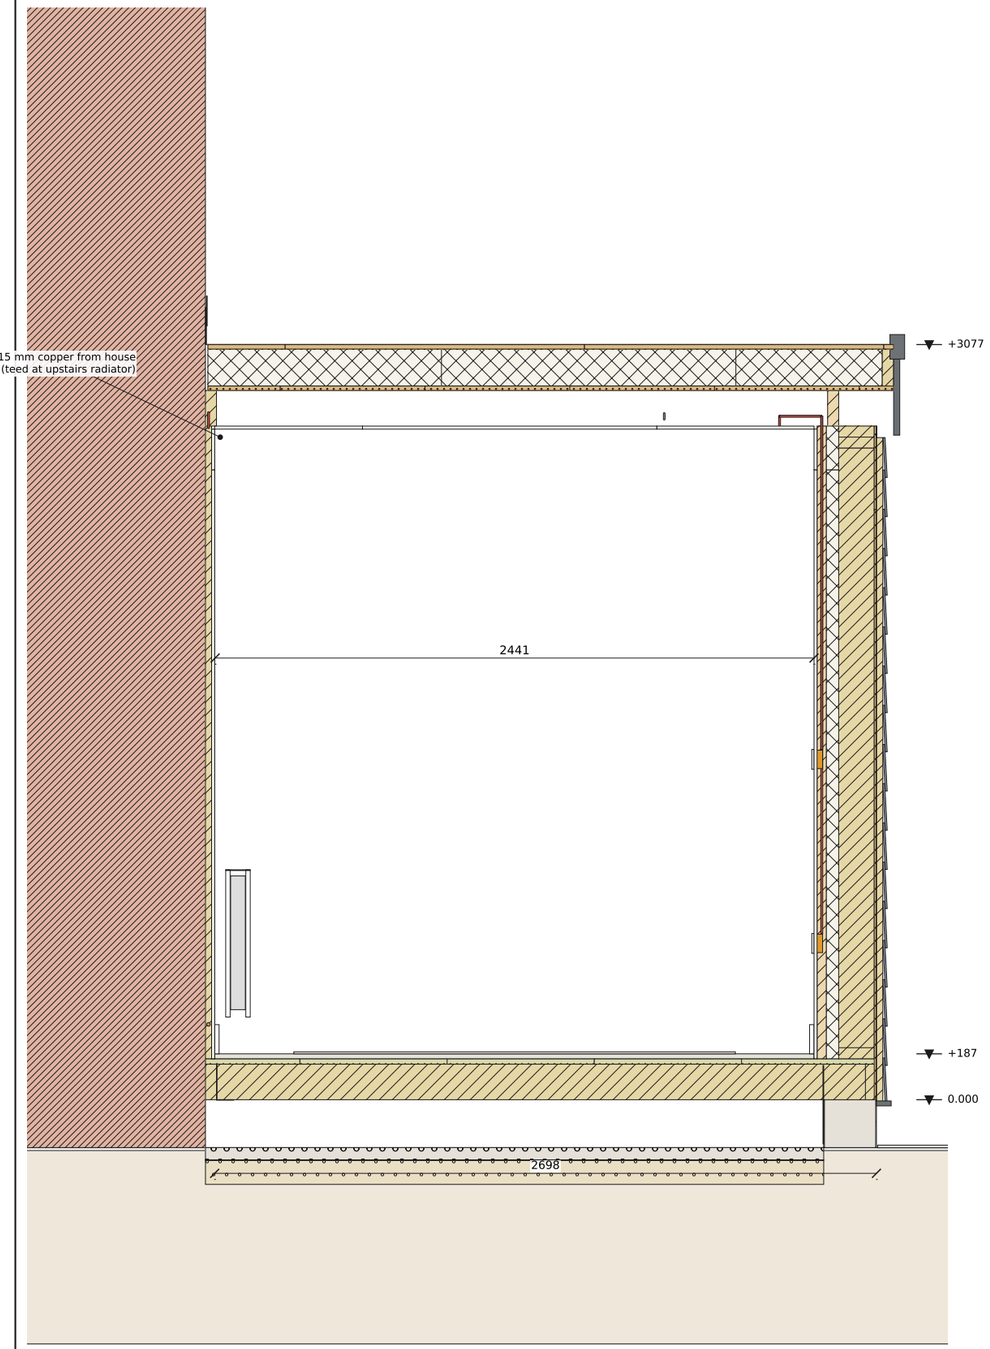


SECTION B-B (y = 3000)

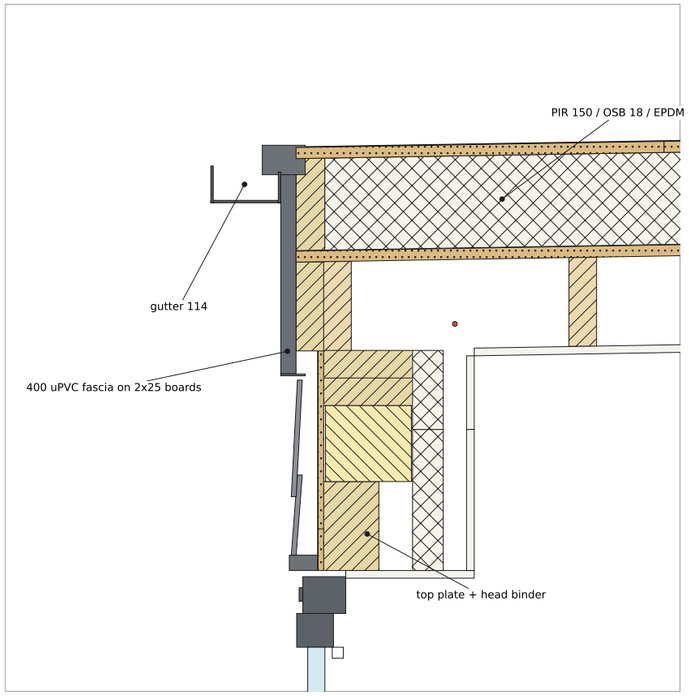


DETAIL 2: eaves & gutter (1:10)

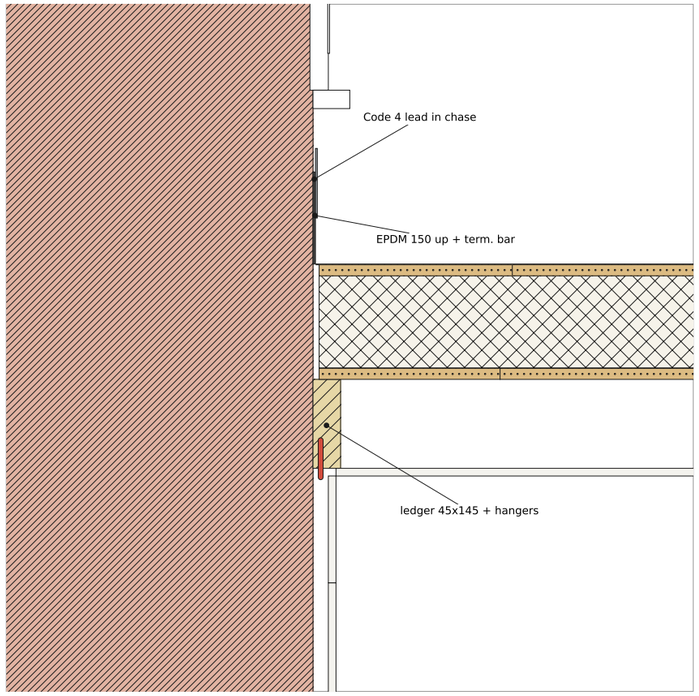


DETAIL 3: abutment to house wall (1:10)

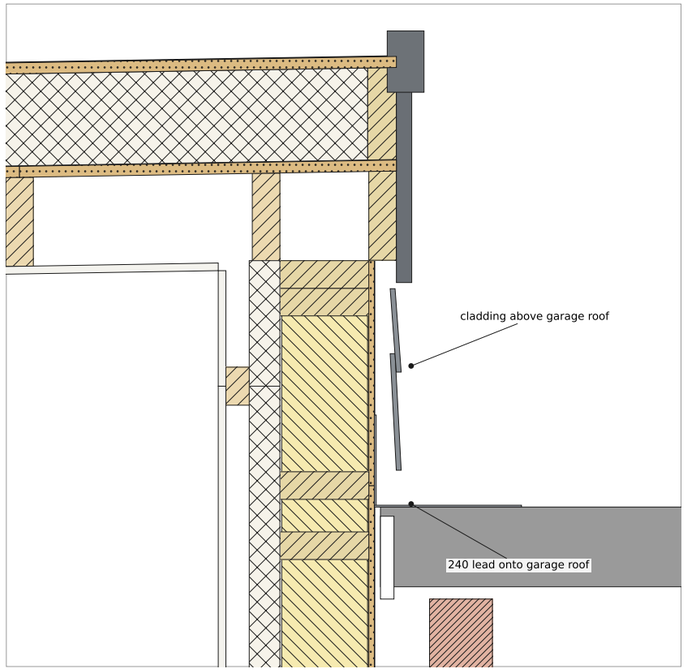


DETAIL 4: back wall / garage roof (1:10)

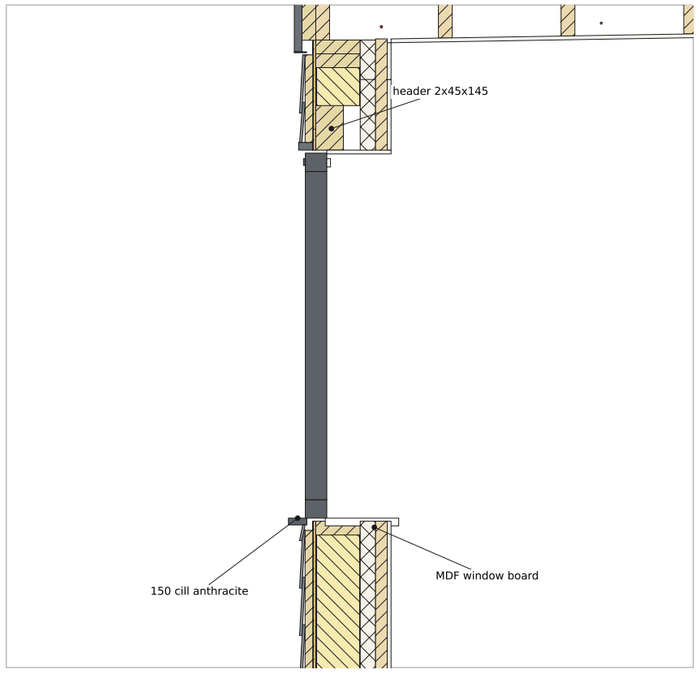


Timber-frame bedroom extension, 2.95 x 4.70 m	
Section B-B and details	**Sheet 06**
Scale 1:25 / 1:10 @A3	10.10.2026 rev A

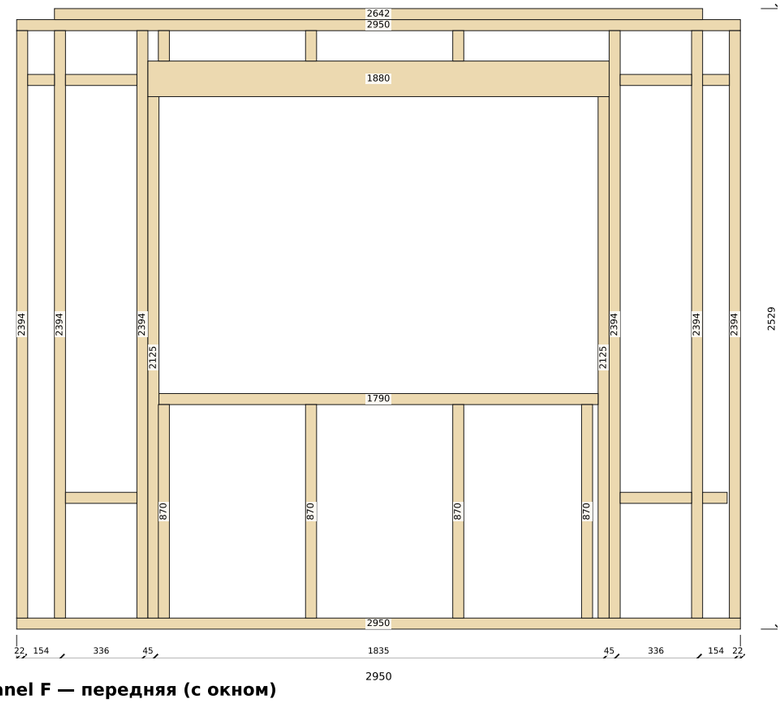


Panel F — передняя (с окном)

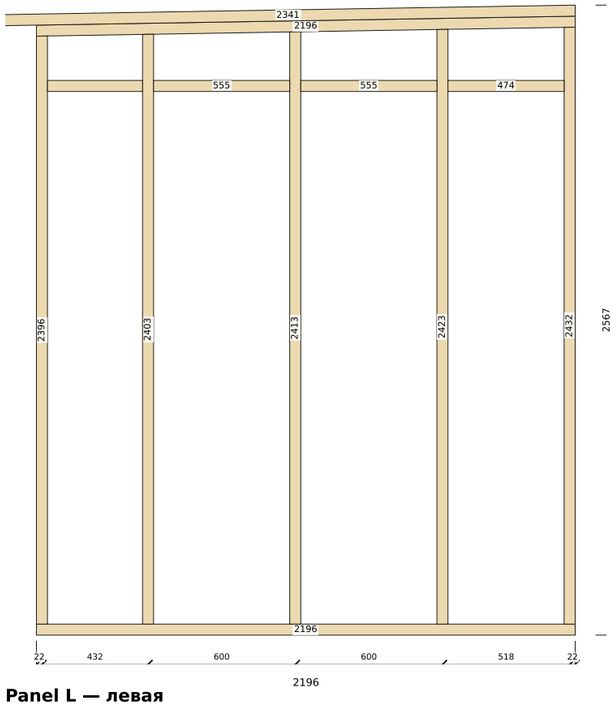


Panel L — левая

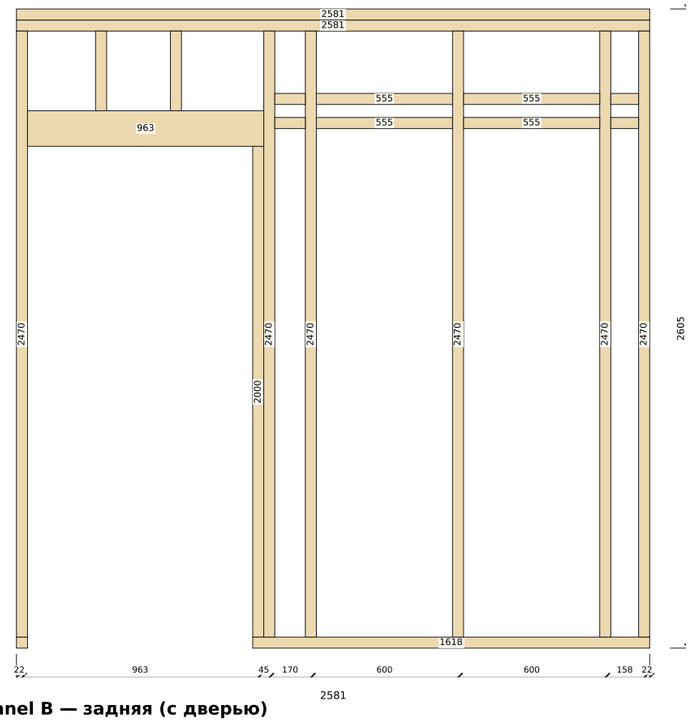

Panel B — задняя (с дверью)

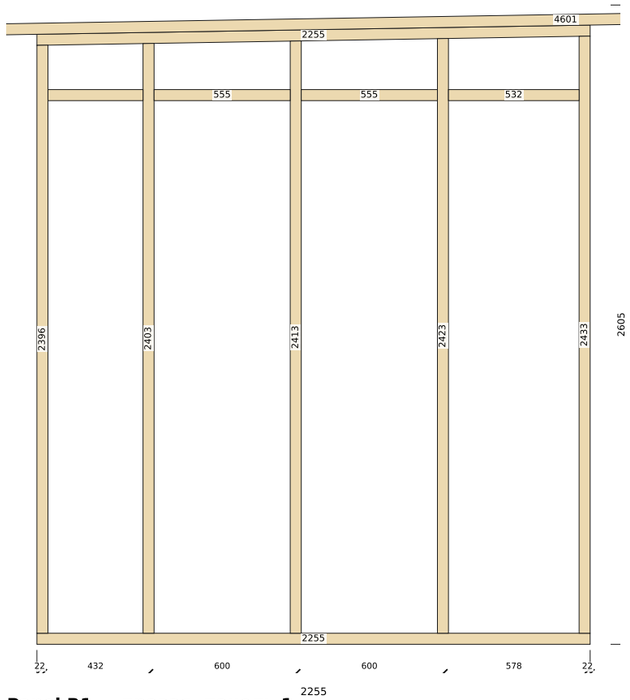

Panel R1 — правая, панель 1

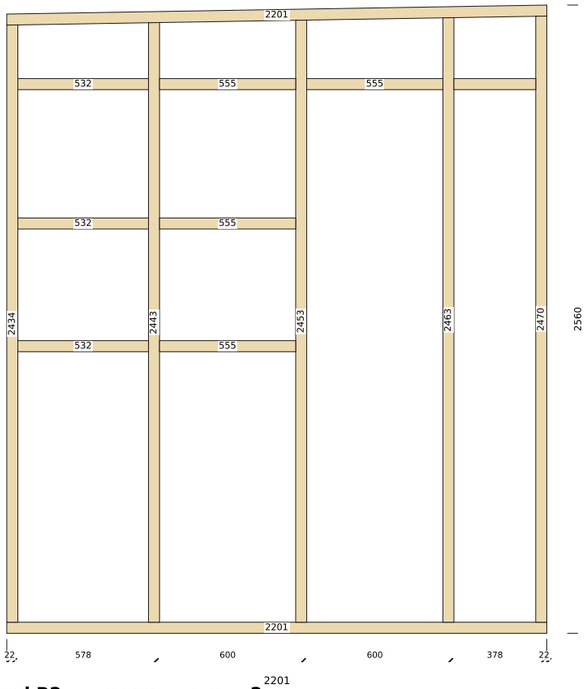


Panel R2 — правая, панель 2

PANEL NOTES
- Assemble flat on the deck, check diagonals (±3 mm).
- Sole + studs + top plate: 3.1x90 nails (2 per joint) or 5x100 screws; head binder fitted after panels are erected.
- OSB 9 fixed before lifting: 2.8x50 ring nails @150 edges, @300 field; 3 mm gaps.
- Side walls L, R1, R2 have raked heads 1:60 — every stud is a different length (figures on drawings).
- Fix panels to deck/rim with 6x150 screws @400, to house with stainless brackets + M10 resin anchors.
- Window RO 1790 x 1210 (1770x1190 window + 10 mm all round).

Timber-frame bedroom extension, 2.95 x 4.70 m

Wall panels: framing elevations (from inside)	**Sheet 07**
Scale 1:25 @A3. Stud figures = cut length, mm.	10.10.2026 rev A

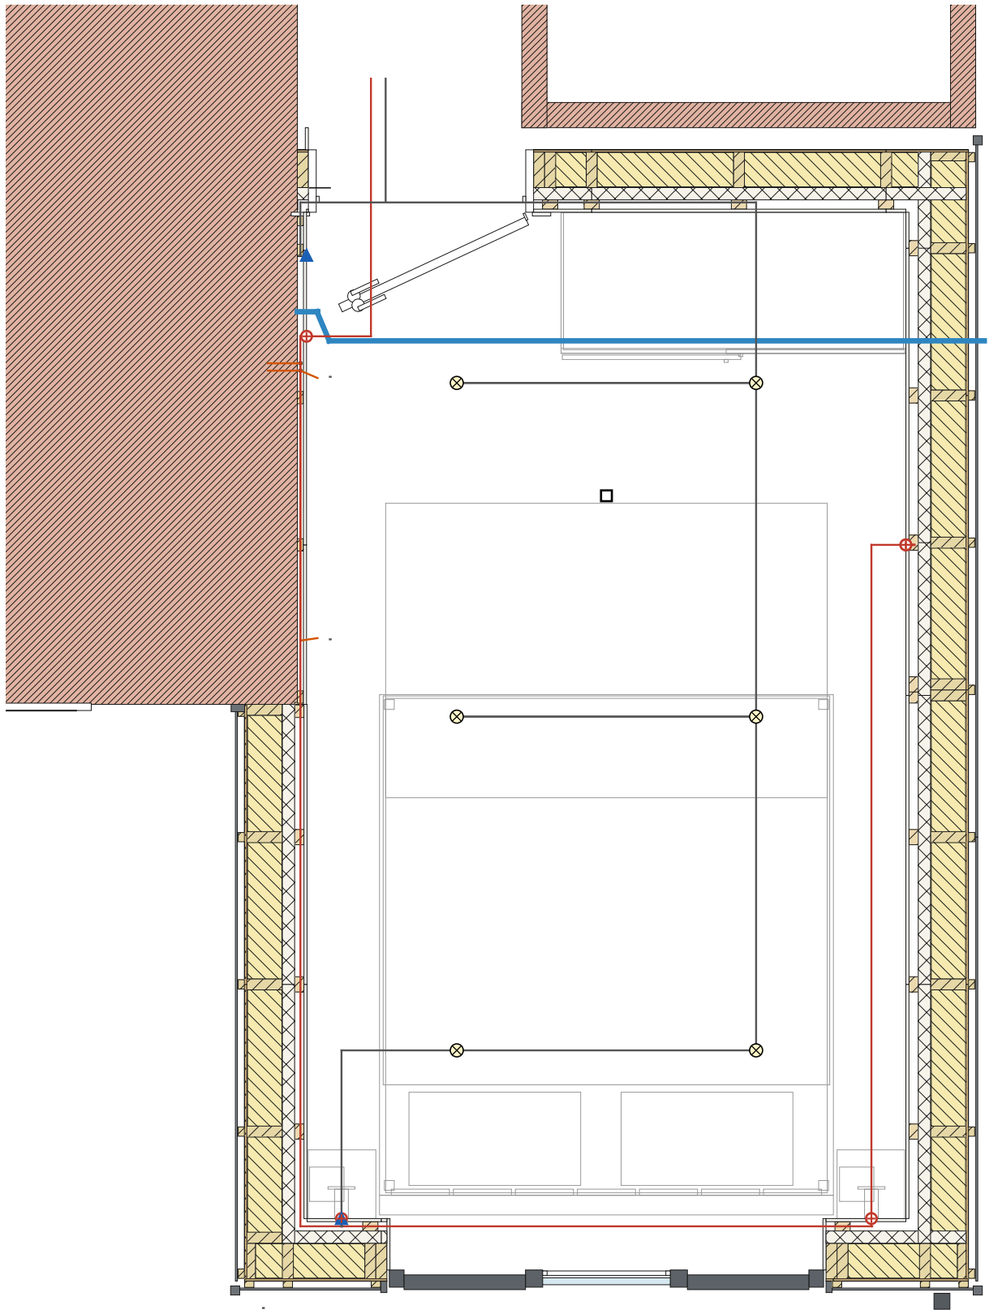

○+ double socket 13A (2 with USB-C by bed)

▲ switches: 2-gang at door (room/outside), 2-way at bed

⊗ LED downlights 6 W (6 no.), dimmable

□ mains interlinked smoke alarm (Part B)

— 4 mm² socket radial 32A (existing in passage)

— 1.5/2.5 mm² lighting (2.5 existing in passage)

— 15 mm copper heating flow/return

— Ø100 kitchen extract duct (ceiling void)

ELECTRICAL (BS 7671, Part P)
• Cables in 38 mm service void behind PB, in safe zones; holes through joists at mid-depth (≥50 mm from edges).
• Do not penetrate VCL (PIR foil): back boxes within service void only.
• Socket circuit 4 mm² radial 32A RCD 30 mA; lighting 6A.
• Notifiable work: connection, testing & EIC by registered electrician.

HEATING
• Tee into flow/return of upstairs radiator (under floor).
• Through wall at ≈+2700 in sleeves, drop in house-wall lining to 600x1000 type 22 radiator (≈1260 W at ΔT40).
• Room heat loss ≈557 W (−3/+20°C).
• Flush, inhibitor, bleed, balance.

KITCHEN EXTRACT
• Existing outlet in house wall must not be blocked.
• Rigid Ø100 duct boxed up, then in joist void to right verge, terminal with back-draught flap.
• Confirm it is not a boiler flue (if so — Gas Safe engineer).

ELECTRICAL & HEATING PLAN

Timber-frame bedroom extension, 2.95 x 4.70 m	
Services: electrical, heating, ventilation	**Sheet 08**
Scale 1:25 @A3	10.10.2026 rev A